


三片式球阀系列 3PC Ball Valves Series





三片式高压球阀 3PC High Pressure Ball Valve

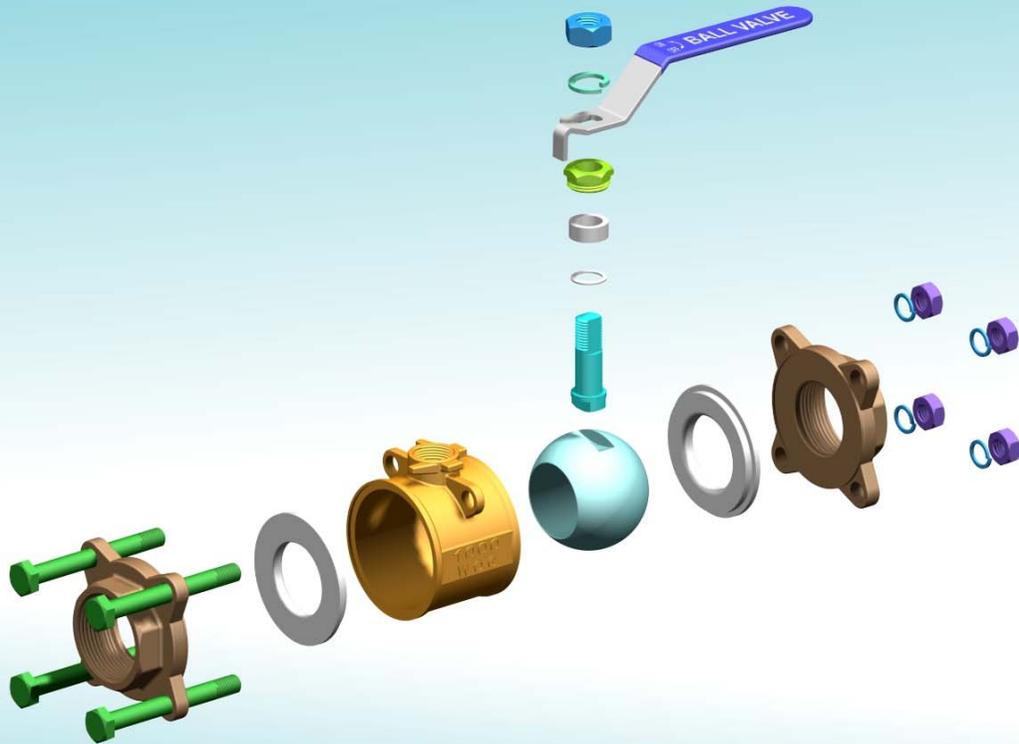

特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 21MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 锻造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 21MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * FORGING BODY
- * 3000PSI(PN210)W.O.G
- * MATERIAL STANDARD : S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

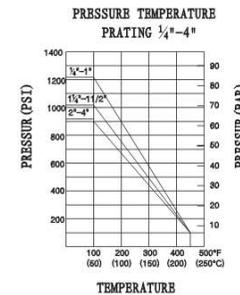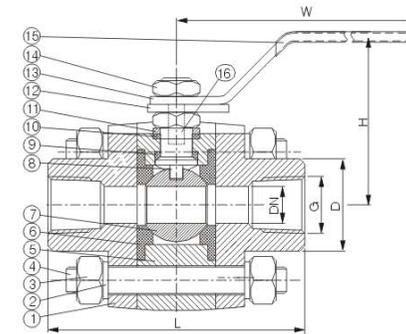

主要零件及材质 Main Parts and Materials

No.	Part Name	Material
1	CAP	SS304/SS316/A105
2	BOLT WASHER	SS304/SS
3	HEX NUT	SS304/SS
4	BOLT	SS304/SS
5	BODY	SS304/SS316/A105
6	SEAT	PTFE
7	BALL	SS316/SS304/SS
8	STEM	SS316/SS304/SS
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SS304/SS
12	LOCATING PIECE	SS304/SS
13	HANDLE	SS304/SS
14	STEM NUT	SS304/SS
15	PLASTIC COVER	PLASTIC
16	DOWEL	SS304/SS

主要外形尺寸 Main outer size

DN	G	DN	D	L	W	H
15	1/2"	14	35	92	120	70
20	3/4"	20	40	111	120	80
25	1"	23	50	127	130	90
32	1 1/4"	32	60	140	160	110
40	1 1/2"	38	65	152	160	120
50	2"	49	78	158	280	130

三片式内螺纹球阀 3PC Female Thread Ball Valve



特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308



- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD : S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	CF8M/CF8/WCB
2	BOLT WASHER	SS304/SS/SS316
3	HEX NUT	SS304/SS/SS316
4	BOLT	SS304/SS/SS316
5	BODY	CF8M/CF8/WCB
6	SEAT	PTFE
7	BALL	SS316/SS304/SS
8	STEM	SS316/SS304/SS
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SS304/SS
12	HANDLE	SS304/SS
13	SPRING WASHER	SS304/SS
14	STEM NUT	SS304/SS
15	PLASTIC COVER	PLASTIC

主要外形尺寸 Main outer size

DN	G	D	L	W	H
15	1/2"	15	70.0	105.0	54.0
20	3/4"	20	84.0	105.0	63.0
25	1"	25	94.0	125.0	63.0
32	1 1/4"	32	112.5	140.0	84.5
40	1 1/2"	38	123.0	162.0	93.0
50	2"	49	145.0	162.0	101.5
65	2 1/2"	65	181.0	215.0	120.0
80	3"	80	186.0	224.0	125.0
100	4"	100	220.0	251.0	180.0

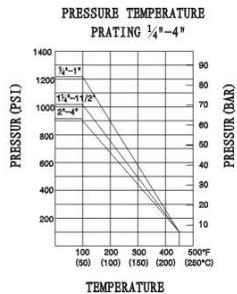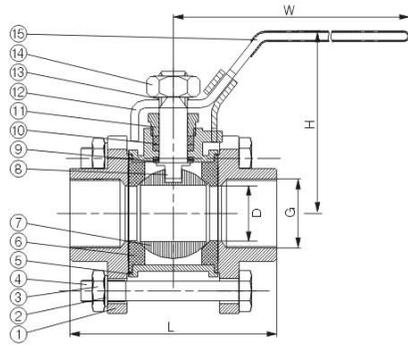

三片式插焊球阀 3PC Socket Welding Ball Valve



特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308



- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD : S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	CF8M/CF8/WCB
2	BOLT WASHER	SS304/SS/SS316
3	HEX NUT	SS304/SS/SS316
4	BOLT	SS304/SS/SS316
5	BODY	CF8M/CF8/WCB
6	SEAT	PTFE
7	BALL	SS316/SS304/SS
8	STEM	SS316/SS304/SS
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SS304/SS
12	HANDLE	SS304/SS
13	SPRING WASHER	SS304/SS
14	STEM NUT	SS304/SS
15	PLASTIC COVER	PLASTIC

主要外形尺寸 Main outer size

DN	G	D	L	W	H
15	1/2"	15	75.0	105.0	54.0
20	3/4"	20	84.0	105.0	63.0
25	1"	25	94.0	125.0	63.0
32	1 1/4"	32	110.0	140.0	84.5
40	1 1/2"	38	123.0	162.0	93.0
50	2"	49	145.0	162.0	101.5
65	2 1/2"	65	181.0	215.0	120.0
80	3"	80	186.0	224.0	125.0
100	4"	100	220.0	251.0	180.0

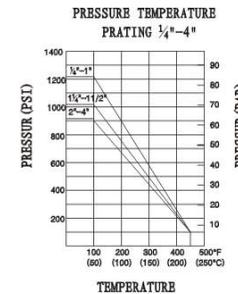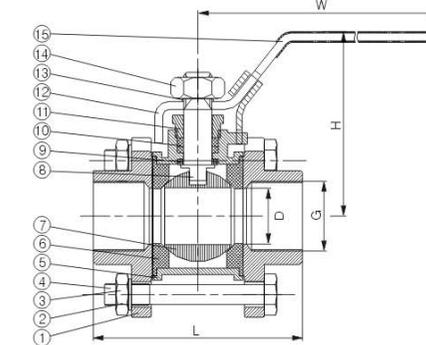

三片式对焊球阀 3PC Butt-Welding Ball Valve



特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308



- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	CF8M/CF8/WCB
2	BOLT WASHER	SS304/SS/SS316
3	HEX NUT	SS304/SS/SS316
4	BOLT	SS304/SS/SS316
5	BODY	CF8M/CF8/WCB
6	SEAT	PTFE
7	BALL	SS316/SS304/SS
8	STEM	SS316/SS304/SS
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SS304/SS
12	HANDLE	SS304/SS
13	SPRING WASHER	SS304/SS
14	STEM NUT	SS304/SS
15	PLASTIC COVER	PLASTIC

主要外形尺寸 Main outer size

NPS	DN	d	D	L	W	H
1/4	8.0	12.5	16.4	68.0	90.0	53.0
3/8	10.0	12.5	18.6	68	90.0	53.0
1/2"	15.0	15.0	22.6	74	90.0	56.0
3/4"	20.0	20.0	28.8	84	108	65.0
1"	25.0	25.0	34.8	94	123	69.0
1 1/4"	32.0	32.0	44.2	110	170	81.5
1 1/2"	40.0	38.0	50.8	126	170	86.5
2"	50.0	49.0	62.8	147	170	102
2 1/2"	65.0	62.0	75.4	185	240	133
3"	80.0	76.0	94.0	216	240	133
4"	100.0	94.0	114.0	270	280	173

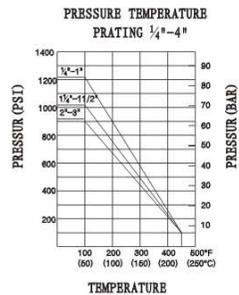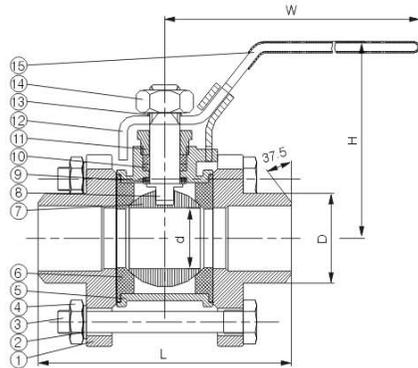

三片式快装球阀 3PC Quick Installed Ball Valve



特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308


- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	CF8M/CF8/WCB
2	BOLT WASHER	SS304/SS/SS316
3	HEX NUT	SS304/SS/SS316
4	BOLT	SS304/SS/SS316
5	BODY	CF8M/CF8/WCB
6	SEAT	PTFE
7	BALL	SS316/SS304/SS
8	STEM	SS316/SS304/SS
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SS304/SS
12	HANDLE	SS304/SS
13	SPRING WASHER	SS304/SS
14	STEM NUT	SS304/SS
15	PLASTIC COVER	PLASTIC

主要外形尺寸 Main outer size

NPS	DN	d	D	d1	L	W	H
1/2"	15	15	50.5	43.5	96	108	54
3/4"	20	20	50.5	43.5	108	108	60
1"	25	25	50.5	43.5	112	125	70
1 1/4"	32	32	50.5	43.5	130	125	75
1 1/2"	40	38	50.5	43.5	140	170	90
2"	50	50	64	56.5	160	170	100

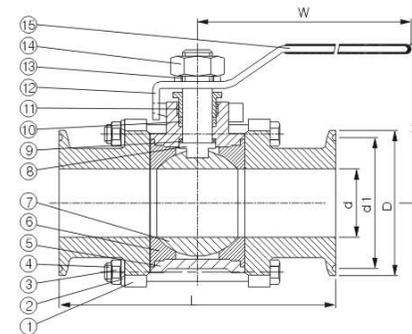

三片式高平台球阀 (ISO)

3PC Platform Ball Valve




特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	CF8M/CF8/WCB
2	BOLT WASHER	SS304/SS/SS316
3	HEX NUT	SS304/SS/SS316
4	BOLT	SS304/SS/SS316
5	BODY	CF8M/CF8/WCB
6	SEAT	PTFE
7	BALL	SS316/SS304/SS
8	STEM	SS316/SS304/SS
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SS304/SS
12	SPRING WASHER	SS304/SS
13	STEM NUT	SS304/SS
14	BLOCK ONLY RETREAT	SS

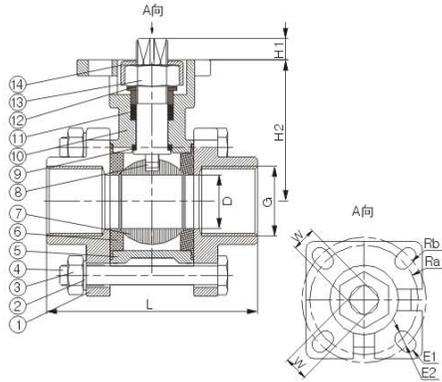

主要外形尺寸 Main outer size

DN	G	D	L	W	H1	H2	E1	E2	Ra	Rb
6	1/4"	6	60	9	9	40	R3	R3	18	21
10	3/8"	10	60	9	9	40	R3	R3	18	21
15	1/2"	14	75	9	9	40	R3	R3	18	21
20	3/4"	19	80	9	9	45	R3	R3	18	21
25	1"	24	90	11	11	55	R3	R3.5	21	25
32	1 1/4"	32	110	11	11	60	R3	R3.5	21	25
40	1 1/2"	38	120	14	14	75	R3.5	R4.5	25	35
50	2"	50	140	14	14	83	R3.5	R4.5	25	35
65	2 1/2"	65	185	17	17	108	R3.5	R4.5	25	35
80	3"	80	205	17	17	116	R4.5	R5.5	35	51
100	4"	98	240	22	22	130	R4.5	R5.5	35	51

三片式加长对焊球阀

3PC Prolonged Butt Welding Ball Valve





特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials


1	CAP	CF8M/CF8/WCB
2	BOLT WASHER	SS304/SS/SS316
3	HEX NUT	SS304/SS/SS316
4	BOLT	SS304/SS/SS316
5	BODY	CF8M/CF8/WCB
6	SEAT	PTFE
7	BALL	SS316/SS304/SS
8	STEM	SS316/SS304/SS
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SS304/SS
12	HANDLE	SS304/SS
13	SPRING WASHER	SS304/SS
14	STEM NUT	SS304/SS
15	PLASTIC COVER	PLASTIC

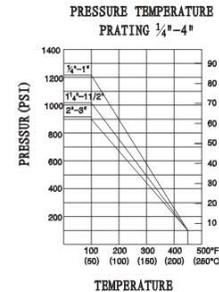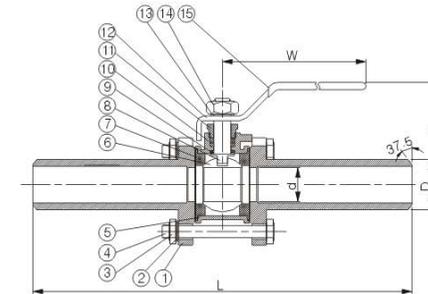

主要外形尺寸 Main outer size

NPS	DN	d	D	L	W	H
1/4"	8	10	18	225	90	55
3/8"	10	10	18	225	90	55
1/2"	15	15	22	225	90	60
3/4"	20	20	28	225	130	65
1"	24	24	34	245	145	69
1 1/4"	32	32	44	255	170	82
1 1/2"	40	38	51	260	170	90
2"	50	50	61	294	180	102
2 1/2"	65	65	76	334	250	130
3"	80	76	92	354	250	130
4"	100	100	115	346	280	150

二片式球阀系列 2PC Ball Valves Series

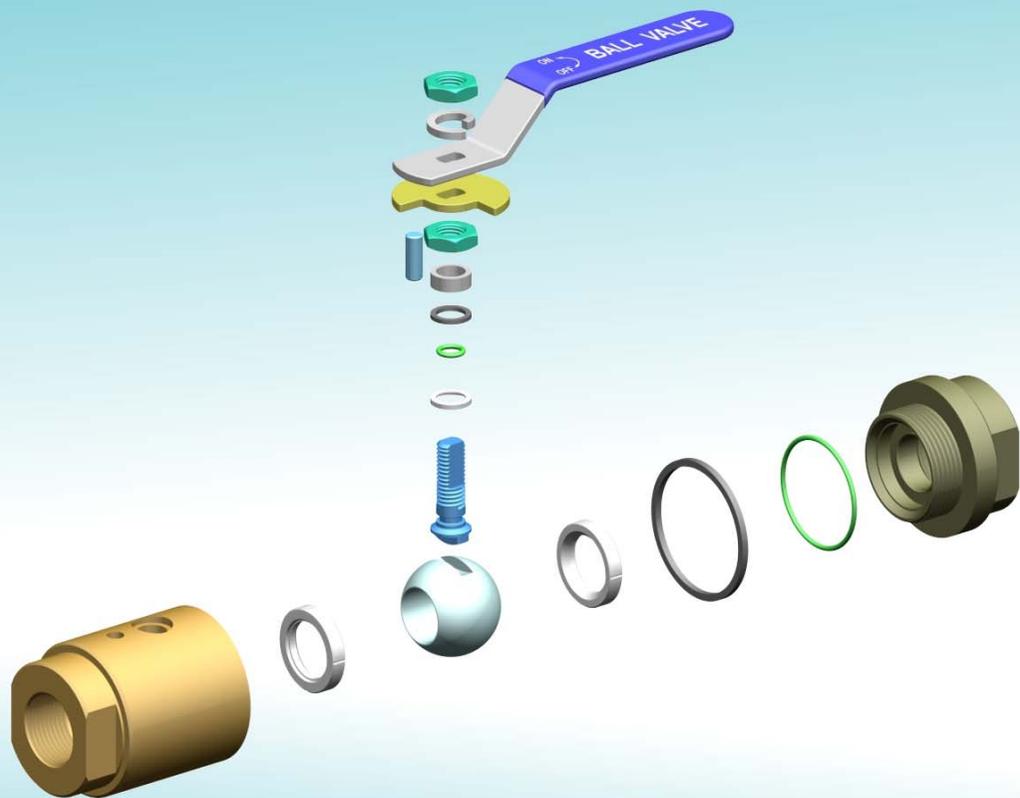

二片式高压球阀 2PC High Pressure Ball Valve

特点 Features


- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 42MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 锻造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 42MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * FORGING BODY
- * 6000PSI(PN420)W.O.G
- * MATERIAL STANDARD : S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308



主要零件及材质 Main Parts and Materials



1	BODY	F53/F316L/F304/WCB
2	BALL	F53/F316L/F304
3	SEAT	RPTFE
4	GASKET	RPTFE
5	CAP	F53/F316L/F304/WCB
6	STEM	F53/316L
7	THRUST WASHER	RPTFE
8	HANDLE	SS+PVC
9	LOCATING PIECE	SS316/SS304
10	NUTS	A194-8
11	BELLEVILLE WASHER	SS316/SS304
12	PACKING GLAND	SS316/SS304
13	PACKING	RPTFE
14	O-RINGS	VITON
15	STOPPER	SS316/SS304

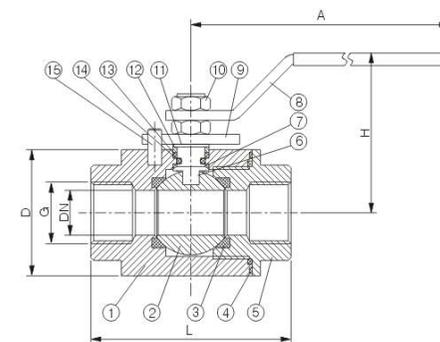

主要外形尺寸 Main outer size

NPS	DN	G	L	D	H	A
1/2"	14	1/2"-14NPT	80	49	62	120
3/4"	19	3/4"-14NPT	90	54	65	120
1"	23	1"-11.5NPT	108	59	67	120
1 1/4"	31	1 1/4"-11.5NPT	115	64	80	148
1 1/2"	38	1 1/2"-11.5NPT	125	78	95	148
2"	50	2"-11.5NPT	140	109	115	265

二片式内螺纹球阀 2PC Female Thread Ball Valve

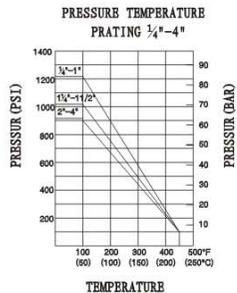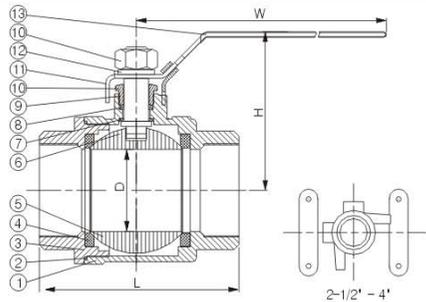

特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308


主要零件及材质 Main Parts and Materials

1	BODY	CF8M/CF8/WCB
2	GASKET	PTFE
3	CAP	CF8M/CF8/WCB
4	SEAT	PTFE
5	BALL	SS316/SS304/SS
6	STEM	SS316/SS304/SS
7	THRUST WASHER	PTFE
8	PACKING	PTFE
9	GLAND	SS304/SS
10	STEM NUT	SS304/SS
11	HANDLE	SS304/SS
12	SPRING WASHER	SS304/SS
13	PLASTIC COVER	PLASTIC
14	STEM NUT	SS304/SS

主要外形尺寸 Main outer size

NPS	DN	D	L	W	H
1/4	8.0	11.5	53.5	93.0	51.0
3/8	10.0	11.5	53.5	93.0	51.0
1/2"	15.0	13.5	62.0	93.0	55.5
3/4"	20.0	17.5	74.0	110.0	59.0
1"	25.0	22.5	87.0	125.0	68.5
1 1/4"	32.0	29.0	105.0	145.0	75.0
1 1/2"	40.0	35.0	108.0	170.0	86.0
2"	50.0	48.0	125.0	170.0	96.0
2 1/2"	65.0	65.0	164.0	210.0	127.5
3"	76.0	80.0	177.5	240.0	134.0
4"	100.0	100.0	228.0	314.0	160.0

二片式韩式球阀 2PC Ball Valve

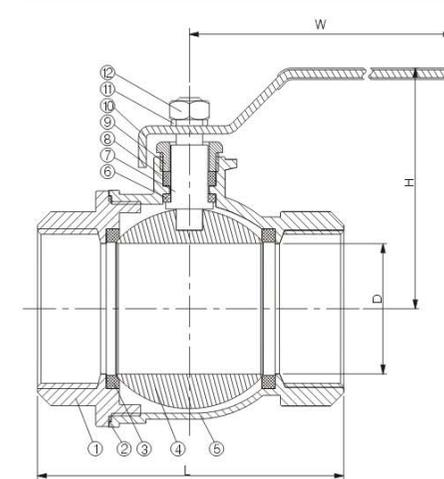

特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	CF8/CF8M
2	GASKET	PTFE
3	SEAT	PTFE
4	BALL	SS316/SS304/SS
5	BODY	CF8/CF8M
6	THRUS WASHER	PTFE
7	STEM	SS316/SS304
8	PACKING	PTFE
9	GLAND	SS304/SS
10	HANDLE	SS201
11	SPRING WASHER	SS304/SS
12	STEM NUT	SS304/SS

主要外形尺寸 Main outer size

NPS	D	L	H	W
1/4	9	50	44	90
3/8	10	48.5	44	90
1/2"	14	56	53	90
3/4"	18	62	60	108
1"	22	76	70	120
1 1/4"	28	83	80	145
1 1/2"	34	90	96	170
2"	46	111	96	170
2 1/2"	54	136	96	170
3"	65	154	210	170
4"	80	177	240	210

二片式缩径球阀 2PC Reduced Port Ball Valve



特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 缩径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308


- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * REDUCED PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	WCB/CF8/CF8M
2	GASKET	PTFE
3	BODY	WCB/CF8/CF8M
4	BALL	SS304/SS316/SS
5	SEAT	PTFE
6	THRUST WASHER	PTFE
7	STEM	SS304/SS316/SS
8	PACKING	PTFE
9	GLAND	SS304/SS
10	SPRING WASHER	SS304/SS
11	STEM NUT	SS304/SS
12	HANDLE	SS201
13	PLASTIC COVER	PLASTIC

主要外形尺寸 Main outer size

NPS	L	D	H	W
1/2"	51	1.0	45	90
3/4"	58	1.4	50	100
1"	66	2.0	55	108
1 1/4"	78	2.4	70	125
1 1/2"	88	3.2	75	148
2"	98	3.8	90	165

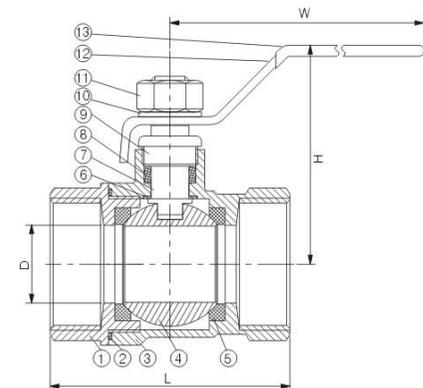

二片式德标球阀 2PC DIN Ball Valve



特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308



- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	WCB/CF8M/CF8
2	CAP	WCB/CF8M/CF8
3	SEAT	PTFE
4	BALL	SS316/SS304/SS
5	STEM	SS316/SS304/SS
6	GASKET	PTFE
7	THRUST WASHER	PTFE
8	PACKING	PTFE
9	GLAND	SS304/SS
10	HANDLE	SS304/SS
11	SPRING WASHER	SS304/SS
12	STEM NUT	SS304/SS
13	LOCKING DEVICE	SS304/SS
14	PLASTIC COVER	PLASTIC

主要外形尺寸 Main outer size

NPS	DN	D	L	W	H	Ra	Rb
1/2"	15	15	75	110	71	18	4
3/4"	20	20	80	122	67.5	18	4
1"	25	25	90	122	70	18	5
1 1/4"	32	32	110	170	80	25	5
1 1/2"	40	38	120	170	91	25	5
2"	50	50	140	170	98	50	5
2 1/2"	65	64	185	210	128	-	-
3"	80	76	205	240	134	-	-
4"	100	100	240	314	160	-	-

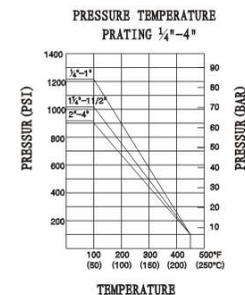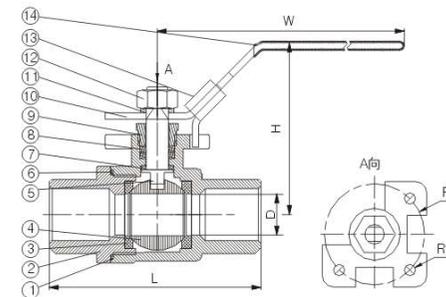

二片式德标球阀 2PC DIN Ball Valve

特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308


- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	WCB/CF8/CF8M
2	SEAT	PTFE
3	BALL	SS304/SS316/SS
4	CAP	WCB/CF8/CF8M
5	GASKET	PTFE
6	THRUST WASHER	PTFE
7	FILLER	PTFE
8	GLAND	SS304/SS
9	SPRING WASHER	SS304/SS
10	NUT	SS304/SS
11	STEM	SS304/SS316/SS
12	HANDLE	SS
13	PLASTIC COVER	PLASTIC

主要外形尺寸 Main outer size

NPS	DN	RC	L	H	A
1/2"	14	1/2"	76	56	110
3/4"	19	3/4"	80	56	110
1"	24	1"	90	70	130
1 1/4"	32	1 1/4"	110	75	150
1 1/2"	38	1 1/2"	120	90	160
2"	48	2"	140	100	160
2 1/2"	65	2 1/2"	185	128	210
3"	80	3"	205	134	240
4"	100	4"	240	160	314

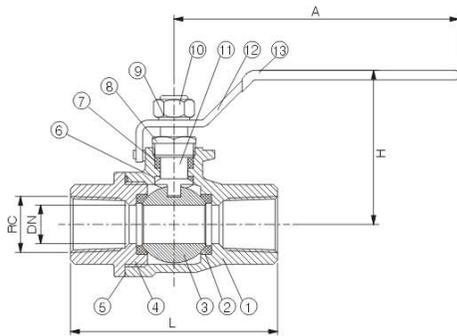

二片式螺柱型球阀 2PC Screw Bolt Ball Valve



特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 缩径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * REDUCED PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	WCB/CF8/CF8M
2	SEAT	PTFE
3	BALL	SS304/SS316/SS
4	BOLT	SS304/SS
5	GASKET	PTFE
6	CAP	WCB/CF8/CF8M
7	NUT	SS304/SS
8	STEM	SS304/SS316
9	FILLER	PTFE
10	SPRING WASHER	SS304/SS
11	NUT	SS304/SS
12	GLAND	SS304/SS
13	THRUST WASHER	PTFE
14	HANDLE	SS
15	PLASTIC COVER	PLASTIC

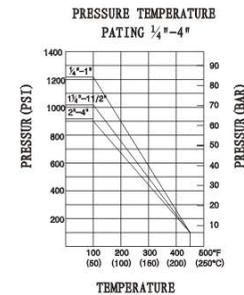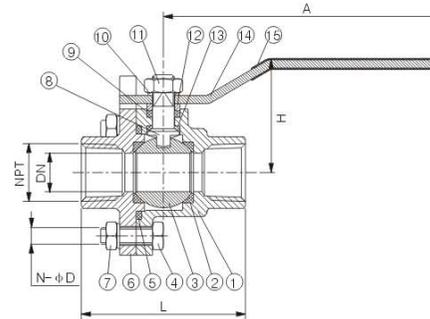

主要外形尺寸 Main outer size

NPS	DN	NPT	L	N-D	H	A
1/2"	14	1/2"	60	4-M6	43	100
3/4"	18	3/4"	72	4-M6	45	100
1"	22	1"	86	4-M8	60	128
1 1/4"	24	1 1/4"	96	4-M8	63	128
1 1/2"	32	1 1/2"	102	4-M10	67	155
2"	46	2"	110	4-M10	77	155

二片式高平台球阀 (ISO) 2PC High Platform Ball Valve




特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	WCB/CF8M/CF8
2	CAP	WCB/CF8M/CF8
3	SEAT	PTFE
4	BALL	SS316/SS304
5	STEM	SS316/SS304/SS
6	THRUST WASHER	PTFE
7	GASKET	PTFE
8	PACKING	PTFE
9	GLAND	SS304/SS
10	STUD BOLT	SS304/SS
11	BLOCK ONLY RETREAT	SS304/SS

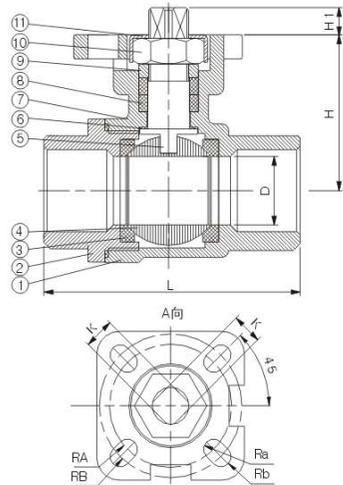

主要外形尺寸 Main outer size

NPS	DN	D	L	H	H1	RA	RB	Ra	Rb	K
1/2"	15	15	62	38	9	18	21	3.0	3.0	9
3/4"	20	20	75	41	9	18	21	3.0	3.0	9
1"	25	25	85	58	11	21	25	3.0	3.5	11
1 1/4"	32	30	91	60	11	21	25	3.0	3.5	11
1 1/2"	40	38	105	75	14	25	35	3.5	4.5	14
2"	50	49	120	80	14	25	35	3.5	4.5	14

保温球阀 Insulating Ball Valve




特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	CF8/CF8M
2	GASKET	PTFE
3	SEAT	PTFE
4	BALL	SS304/SS316
5	BODY	CF8/CF8M
6	O-RING	VITON
7	STEM	SS304/SS316
8	THRUST WASHER	PTFE
9	PACKING	PTFE
10	GLAND	SS304/SS
11	HANDLE	SS
12	SPRING WASHER	SS304/SS
13	STEM NUT	SS304/SS

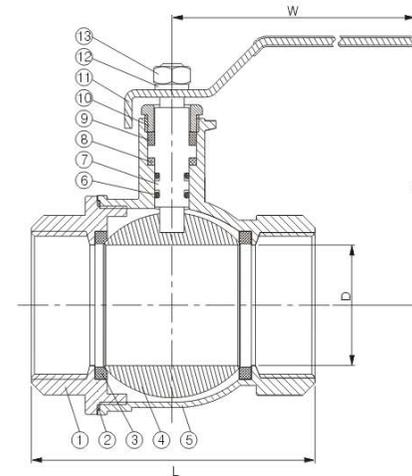

主要外形尺寸 Main outer size

NPS	D	L	H	W
1/2"	14	56	64	90
3/4"	18	62	70	108
1"	22	76	80	120
1 1/4"	28	83	90	145
1 1/2"	34	90	100	170
2"	46	111	100	170

二片式卫生级球阀 2PC Sanitary Ball Valve

特点 Features

- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 材质标准: 304, 316, 316L

- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * MATERIAL STANDARD: 304, 316, 316L

主要零件及材质 Main Parts and Materials


BODY	A105	1Cr18Ni9Ti	SS 304	SS 316	SS 316L
BALL	SS 304	SS 304	SS 304	SS 316	SS 316
STEM	SS 304	SS 304	SS 304	SS 316	SS 316
SEAL	PTFE RPTFE PPL				
HANDLE	SS 304/SS				



WB-25




WB-26

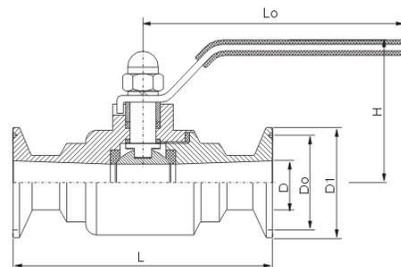

主要外形尺寸 Main outer size

NPS	L	Lo	H	D	Do	D1
3/4"	100	115	58	16.1	43.5	50.5
1"	110	125	60	22.4	43.5	50.5
1 1/4"	130	135	70	28.8	43.5	50.5
1 1/2"	130	150	75	35.1	43.5	50.5
2"	150	165	90	47.8	56.5	64
2 1/2"	210	190	105	59.5	70.5	77.5

一片式球阀系列 1PC Ball Valves Series

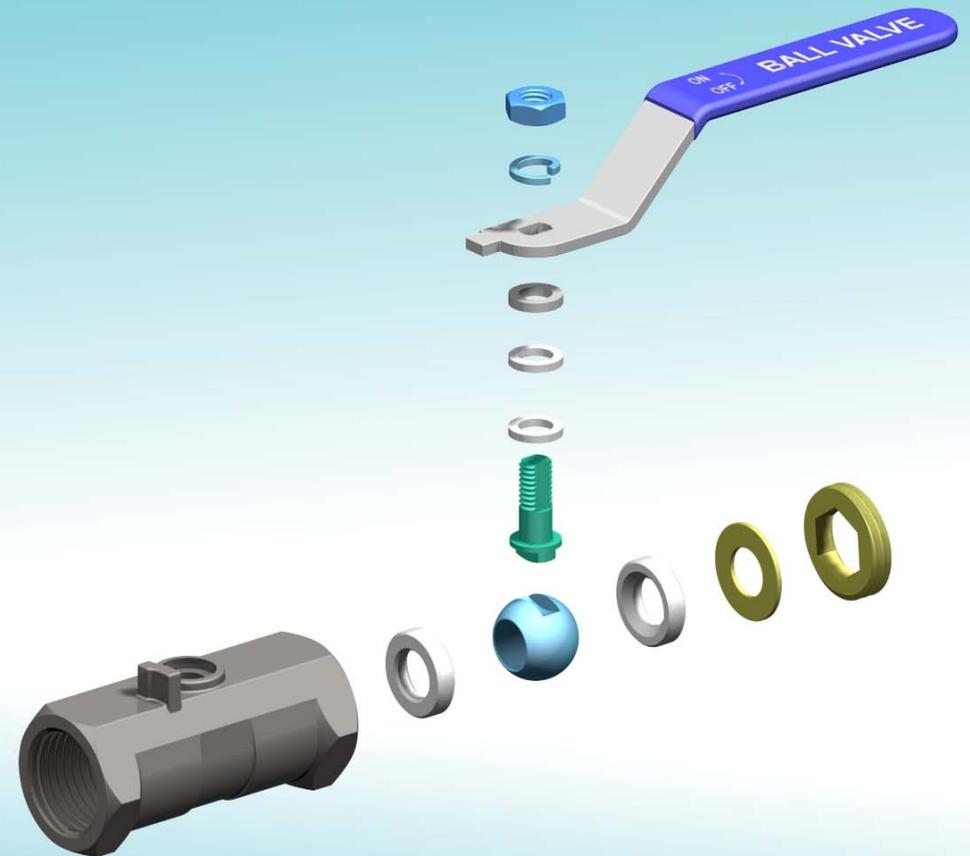

一片式高压球阀 1PC High Pressure Ball Valve



WB-27


特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 42MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 缩径
- * 锻造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 42MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * REDUCED PORT
- * FORGING BODY
- * 6000PSI(PN42)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	A105/F316/F304
2	CAP	A105/F316/F304
3	SEAT	RTFE
4	BALL	ASTM A351-CF8M(316)
5	STEM	A105/F316/F304
6	PACKING	PTFE
7	THRUST WASHER	RTFE
8	PACKING GLAND	SS316/SS304
9	NUT	SS/SS316/SS304
10	HANDLE	SS
11	HANDLE COVER	PLASTIC
12	GASKET	PTFE

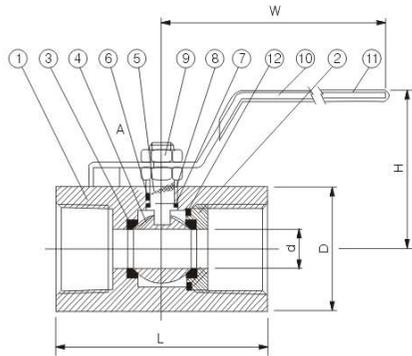

主要外形尺寸 Main outer size

NPS	DN	d	D	L	H	W	重量 Weight (kg)
1/4	8	5.0	21	43	34	70	0.11
3/8	10	7.0	25	47	37	70	0.18
1/2"	15	9.0	30	62.5	60	120	0.34
3/4"	20	12.5	36	70	64	120	0.54
1"	25	16.0	46	86	66	123	0.95
1 1/4"	32	20.0	55	94	78	145	1.40
1 1/2"	40	24.5	61	102	84	150	1.70
2"	50	32.0	75	115	91	150	2.78

一片式内螺纹球阀 1PC Female Thread Ball Valve



WB-28

WB-29

WB-30

特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 最大压力: 6.4MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 全通径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308


- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * BLOW-OUT PROOF STEM / FULL PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	WCB/CF8M/CF8
2	BALL	SS316/SS304/SS
3	SEAT	PTFE
4	CAP	WCB/CF8M/CF8
5	STEM	SS316/SS304/SS
6	THRUST WASHER	PTFE
7	PACKING	PTFE
8	GLAND	SS304/SS
9	HANDLE	SS304/SS
10	SPRING WASHER	SS304/SS
11	STEM NUT	SS304/SS

主要外形尺寸 Main outer size

NPS	D	L	H	W
1/4	5	40	74	30
3/8	7	45	74	30
1/2"	10	60	95	40
3/4"	10	60	95	40
1"	14	70	102	50
1 1/4"	20	80	124	60
1 1/2"	24	85	144	60
2"	32	100	144	70
2 1/2"	38	125	168	90
3"	50	150	192	90
4"	65	195	220	130

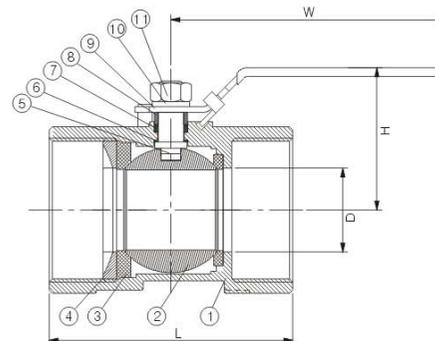

广式球阀 Guang Type Ball Valve


特点 Features

- * 螺纹标准: NPT, BSPT, DIN259/2999, ISO228 CLASS A
- * 压力范围: 1.6~2.5MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 缩径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308


- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * PRESSURE RANGE: 1.6~2.5MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * REDUCED PORT
- * INVESTMENT CASTING BODY
- * 350PSI(FN25)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

BODY	A105	1Cr18Ni9Ti	SS 304	SS 316
BALL	SS 304	SS 304	SS 304	SS 316
STEM	SS 304	SS 304	SS 304	SS 316
SEAL	PTFE RPTFE PPL			
HANDLE	SS 304/SS			

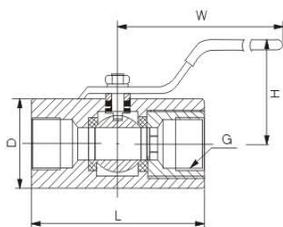

普通型

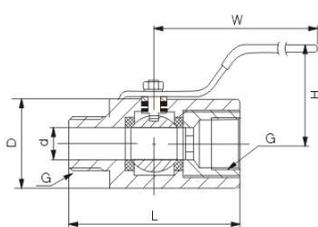

外螺纹型

主要外形尺寸 Main outer size

NPS	d	D	L	W	H
1/2"	11	32	60	110	58
3/4"	13	38	67	110	62
1"	17	45	73	110	68
1 1/4"	23	53	90	150	75
1 1/2"	25	63	97	150	83
2"	32	73	112	180	90
2 1/2"	40	88	135	180	90
3"	50	104	152	220	100
4"	64	125	188	220	115

法兰/三通阀门系列 Flange / Three-way Valves Series



薄型意大利式球阀 (ISO)

Italy Type Thin Ball Valve



WB-33




特点 Features

- * 压力: PN16
- * 结构长度: GB/T12221-1989
- * 法兰标准: GB/T9113
- * 设计: GB/T12237-1989
- * 测试: GB/T13927-1992
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * PRESSURE: PN16
- * STRUCTURE LENGTH: GB/T12221-1989
- * FLANGE END DIMENSIONS: GB/T9113
- * DESIGN: GB/T12237-1989
- * TEST: GB/T13927-1992
- * MATERIAL STANDARD: S45C/ASTM A216GR-WCB/DIN1.00619
SS316/ASTM A351GR-CF8M/DIN1.4408
SS304/ASTM A351GR-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	WCB/CF8/CF8M
2	CAP	WCB/CF8/CF8M
3	SEAT	PTFE
4	BALL	SS316/SS304/SS
5	STEM	SS316/SS304/SS
6	GASKET	PTFE
7	PACKING	PTFE
8	GLAND	SS304/SS
9	SPRING WASHER	SS304/SS
10	STEM NUT	SS304/SS

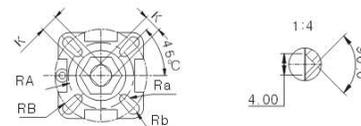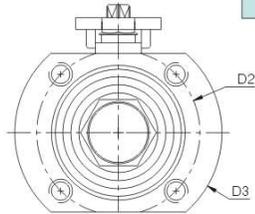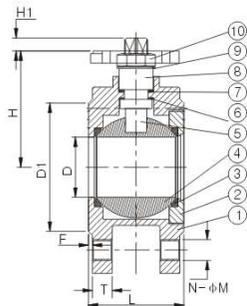

主要外形尺寸 Main outer size

NPS	L	D	H	H1	D1	D2	D3	N-φM	T	F	RA	RB	Ra	Rb	K
1/2"	34	14	55	8	45	65	88	4-M12	9	2	18	21	3	3	9
3/4"	37	20	60	8	57	75	98	4-M12	11	2	18	21	3	3	9
1"	40	25	76	10	66	85	112	4-M12	11	2	21	25	3	3.5	11
1 1/4"	50	32	76	10	75	100	135	4-M16	14	2	21	25	3	3.5	11
1 1/2"	58	38	82	10	87	109	142	4-M16	14	2	25	35	3.5	4.5	14
2"	72	45	82	10	102	124	159	4-M16	15	2	25	35	3.5	4.5	14

薄型意大利式球阀

Italy Type Thin Ball Valve



WB-34

WB-35


特点 Features

- * 压力: PN16
- * 结构长度: GB/T12221-1989
- * 法兰标准: GB/T9113
- * 设计: GB/T12237-1989
- * 测试: GB/T13927-1992
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * PRESSURE: PN16
- * STRUCTURE LENGTH: GB/T12221-1989
- * FLANGE END DIMENSIONS: GB/T9113
- * DESIGN: GB/T12237-1989
- * TEST: GB/T13927-1992
- * MATERIAL STANDARD: S45C/ASTM A216GR-WCB/DIN1.00619
SS316/ASTM A351GR-CF8M/DIN1.4408
SS304/ASTM A351GR-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	WCB/CF8M/CF8
2	CAP	WCB/CF8M/CF8
3	SEAT	PTFE
4	BALL	SS304/SS316/SS
5	SEAL RING	PTFE
6	STEM SEAL	PTFE
7	STEM	SS316/SS304/SS
8	ANTI-STATIC DEVICE	SS304/SS
9	STEM PACKING	PTFE
10	PACKING	SS304/SS
11	SPRING WASHER	SS304/SS
12	HANDLE	SS304/SS
13	STEM NUT	SS304/SS

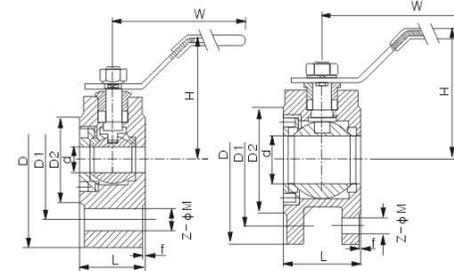

主要外形尺寸 Main outer size

DN	d	D	D1	D2	T	F	L	W	H	Z-φM	D	D1	D2	T	F	L	W	H	Z-φM
15	15	95	65	46	-	2	35	120	60	4-φ12	95	65	46	-	2	35	120	65	4-φ12
20	20	105	76	56	-	2	38	120	65	4-φ12	105	75	56	-	2	38	120	71	4-φ12
25	25	115	85	65	10	2	42	140	70	4-M12	115	85	65	10	2	42	140	76	4-M12
32	32	135	100	75	18	2	52	170	80	4-M16	135	100	75	18	3	52	170	98	4-M16
40	38	145	110	85	18	2	62	200	95	4-M16	145	110	85	18	3	62	200	105	4-M16
50	45.5	160	125	100	18	2	72	240	128	4-M16	160	125	100	18	3	72	240	128	4-M16
65	58	180	145	120	20	2	96	280	135	8-M16	180	145	120	20	3	96	280	145	8-M16
80	73	195	160	135	22	3	118	320	146	8-M16	195	160	135	22	3	118	320	170	8-M16
100	93	215	180	155	24	3	138	400	160	8-M16	230	190	160	24	3	138	400	185	8-M16
125	120	245	210	185	26	3	200	580	177	8-M20	270	220	188	26	3	200	450	205	8-M16
150	145	280	240	210	28	3	225	700	237	8-M20	300	250	218	28	3	225	500	225	8-M20
200	198	335	295	265	30	3	275	700	280	12-M20	360	310	278	30	3	275	600	240	12-M20

一片式法兰球阀
1PC Flanged Ball Valve



WB-36


特点 Features

- * 压力: PN16
- * 结构长度: GB/T12221-1989
- * 法兰标准: GB/T9113
- * 设计: GB/T12237-1989
- * 测试: GB/T13927-1992
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * PRESSURE: PN16
- * STRUCTURE LENGTH: GB/T12221-1989
- * FLANGE END DIMENSIONS: GB/T9113
- * DESIGN: GB/T12237-1989
- * TEST: GB/T13927-1992
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	WCB/CF8M/CF8
2	CAP	WCB/CF8M/CF8
3	SEAT	PTFE
4	BALL	SS316/SS304/SS
5	STEM	SS316/SS304/SS
6	THRUST WASHER	PTFE
7	PACKING	PTFE
8	GLAND	SS304/SS
9	HADLE	SS304/SS
10	SPRING WASHER	SS304/SS
11	STEM NUT	SS304/SS
12	PLASTIC COVER	PLASTIC

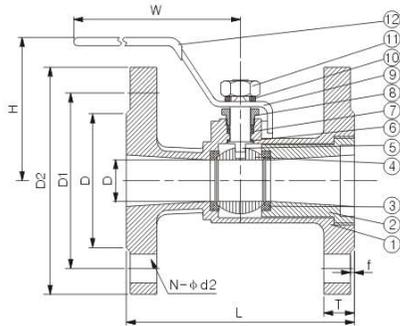

主要外形尺寸 Main outer size

NPS	d	D	D1	D2	T	f	L	W	H	N	d2
1/2"	10.3	46	65	95	14	2	92	125	65	4	14
3/4"	13	56	75	105	14	2	105	135	75	4	14
1"	17	65	85	115	15	2	110	135	87	4	14
1 1/4"	22	76	100	140	16	2	125	147	90	4	18
1 1/2"	25	84	110	150	18	3	135	180	95	4	18
2"	32	99	125	165	18	3	155	180	110	4	18
2 1/2"	40	118	145	185	21	3	170	200	120	8	18
3"	50	132	160	200	24	3	200	230	130	8	18
4"	64	156	190	235	24	3	230	240	150	8	22

美标高平台球阀 Class150
ANSI Ball Valve Class150



WB-37

WB-38


特点 Features

- * 压力范围: Class 150
- * 法兰面标准: ANSI B16.10-1992
- * 法兰端标准: ANSI B16.5
- * 设计: ANSI 16.34 AP1608
- * 测试: API 598 AP16D
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * PRESSURE RANGE: Class 150
- * FACE TO FACE DIMENSIONS: ANSI B16.10-1992
- * FLANGE END DIMENSIONS: ANSI B16.5
- * DESIGN: ANSI 16.34 AP1608
- * TEST: API 598 AP16D
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	WCB/CF8/CF8M
2	NUT	ASTM 194-B8
3	BOLT	ASTM 194-B8
4	GASKET	PTFE
5	BODY	WCB/CF8/CF8M
6	BALL	SS304/316
7	SEAT	PTFE
8	THRUST WASHER	PTFE
9	STEM	SS304/316
10	PACKING	PTFE
11	GLAND	SS304/SS
12	STEM NUT	SS304/SS
13	SPING WASHER	SS304/SS
14	HANDLE	SS304/SS

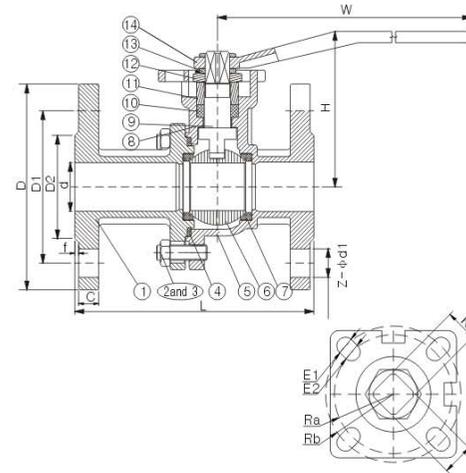


主要外形尺寸 Main outer size

NPS	d	L	H	W	D	D1	D2	C	f	Z-φd1	E2	E1	Ra	Rb	K
1/2"	15	108	85	160	89	60.5	35	11	2	4-φ16	3	3	18	21	9
3/4"	20	117	90	160	96	70	43	11	2	4-φ16	3	3	18	21	9
1"	25	127	100	160	108	79.5	51	12	2	4-φ16	3	3.5	21	25	11
1 1/4"	32	140	105	160	117	89	64	13	2	4-φ16	3	3.5	21	25	11
1 1/2"	40	165	110	206	127	98.5	73	15	2	4-φ16	3.5	4.5	25	35	14
2"	50	178	120	206	152	120.5	92	16	2	4-φ19	3.5	4.5	25	35	14
2 1/2"	65	190	160	324	178	139.5	105	18	2	4-φ19	3.5	4.5	25	35	14
3"	80	203	170	324	190	152.5	127	19	2	4-φ19	4.5	5.5	35	51	17
4"	96	229	185	324	229	190.5	157	24	2	8-φ19	4.5	5.5	35	51	22

美标球阀 Class150 / Class300

ANSI Ball Valve Class150 / Class300

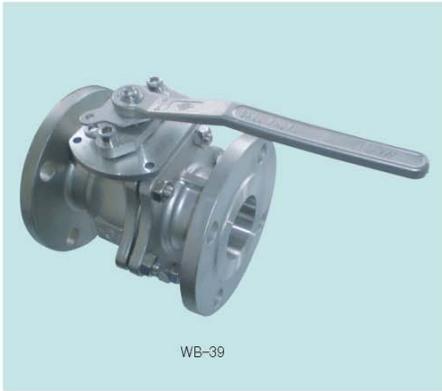


特点 Features

- * 压力范围: Class 150 / Class300
- * 法兰面标准: ANSI B16.10-1992
- * 法兰端标准: ANSI B16.5
- * 设计: ANSI 16.34, API608
- * 测试: API 598, API6D
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * PRESSURE RANGE: Class 150 / Class300
- * FACE TO FACE DIMENSIONS: ANSI B16.10-1992
- * FLANGE END DIMENSIONS: ANSI B16.5
- * DESIGN: ANSI 16.34, API608
- * TEST: API 598, API6D
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	WCB/CF8/CF8M
2	NUT	SS304/SS
3	BLOT	SS304/SS
4	GASKET	PTFE
5	BALL	SS304/SS316
6	BODY	WCB/CF8/CF8M
7	SEAT	PTFE
8	STEM	SS304/SS316
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SS304/SS
12	GLAND BOLT	SS304/SS
13	HANDLE	SS304/SS
14	STOPPER	SS304/SS
15	SNAP RING	SS304/SS

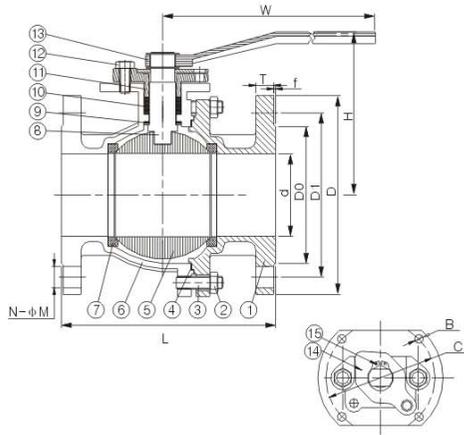

主要外形尺寸 Main outer size

NPS	d	B	H	W	C	Do	D1	D	T	f	N-φM	L	Do	D1	D	T	f	N-φM	L
1/2"	15	11	73	130	42	35	60.5	89	11	2	4-15	108	35	66.5	95	15	2	4-15	140
3/4"	20	11	76	130	42	43	70	98	11	2	4-15	117	43	82.5	117	16	2	4-19	152
1"	25	14	86	160	50	51	79.5	108	12	2	4-15	127	51	89	124	18	2	4-19	165
1 1/4"	32	14	91	160	50	64	89	117	13	2	4-15	140	64	98.5	133	19	2	4-19	178
1 1/2"	38	17	119	200	70	73	98.5	127	15	2	4-15	165	73	114.5	156	21	2	4-19	190
2"	50	17	127	200	70	92	120.5	152	16	2	4-19	178	92	127	165	23	2	8-19	216
2 1/2"	65	22	136	200	102	105	139.5	178	18	2	4-19	190	105	149	190	26	2	8-22	241
3"	76	22	164	325	102	127	152.5	190	19	2	4-19	203	127	168.5	210	29	2	8-22	283
4"	94	22	178	325	102	157	190.5	229	24	2	8-19	229	157	200	254	32	2	8-22	305

日标球阀10K (ISO)

JIS Ball Valve




特点 Features

- * 压力范围: 10K
- * 法兰面标准: JIS 2002-2000
- * 法兰端标准: JIS B2212-1999
- * 设计: ANSI 16.34
- * 测试: GB/T13927-1992
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * PRESSURE RANGE: 10K
- * FACE TO FACE DIMENSIONS: JIS 2002-2000
- * FLANGE END DIMENSIONS: JIS B2212-1999
- * DESIGN: ANSI 16.34
- * TEST: GB/T13927-1992
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	GODY	SUS304/SUS316/WCB
2	SEAT	PTFE
3	BALL	SUS304/SUS316/SS
4	BOLT	SUS304/SS
5	GASKET	PTFE
6	NUT	SUS304/SS
7	CAP	SUS304/SUS316/WCB
8	STEM	SUS304/SS
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SUS304/SS
12	STEM NUT	SUS304/SS
13	HANDLE	SUS304/SS

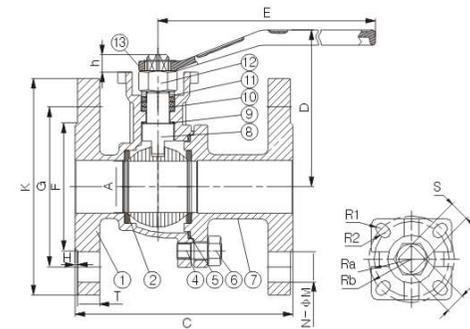

主要外形尺寸 Main outer size

DN	A	F	G	K	T	H	C	D	E	h	N	M	Ra	Rb	R2	R1	S
1/2"	15.0	48.8	70.0	95.0	11.0	1.0	107.0	73.0	140.0	9	4	15.0	18	21	3	3	9
3/4"	18.0	54.0	75.0	100.0	13.0	1.0	117.0	76.0	140.0	9	4	15.0	18	21	3	3	9
1"	24.0	66.0	90.0	125.0	13.0	1.0	127.0	86.0	165.0	11	4	19.0	21	25	3	3.5	11
1 1/4"	32.0	77.0	100.0	135.0	14.0	2.0	137.0	91.0	165.0	11	4	19.0	21	25	3	3.5	11
1 1/2"	36.0	85.0	105.0	140.0	14.0	2.0	165.0	119.0	195.0	14	4	19.0	25	35	3.5	4.5	14
2"	50.0	96.0	120.0	155.0	14.0	2.0	177.0	127.0	195.0	14	4	19.0	25	35	3.5	4.5	14
2 1/2"	62.0	116.0	140.0	175.0	16.0	2.0	188.5	136.0	240.0	14	4	19.0	25	35	3.5	4.5	14
3"	78.0	126.0	150.0	185.0	16.0	2.0	203.5	164.0	260.0	17	8	19.0	35	51	4.5	5.5	17
4"	100.0	151.8	175.0	210.0	16.0	2.0	228.0	178.0	320.0	19	8	19.0	35	51	4.5	5.5	19


国标球阀
GB Ball Valve



特点 Features

- * 压力范围: PN16 / PN25 / PN40
- * 结构长度: GB/T12221-1989
- * 法兰标准: GB/T9113
- * 设计: GB/T12237-1989
- * 测试: GB/T13927-1992
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * PRESSURE RANGE: PN16 / PN25 / PN40
- * STRUCTURE LENGTH: GB/T12221-1989
- * FLANGE END DIMENSIONS: GB/T9113
- * DESIGN: GB/T12237-1989
- * TEST: GB/T13927-1992
- * MATERIAL STANDARD: S45C/ASTM A216GR-WCB/DIN1.00619
SS316/ASTM A351GR-CF8M/DIN1.4408
SS304/ASTM A351GR-CF8/DIN1.4308

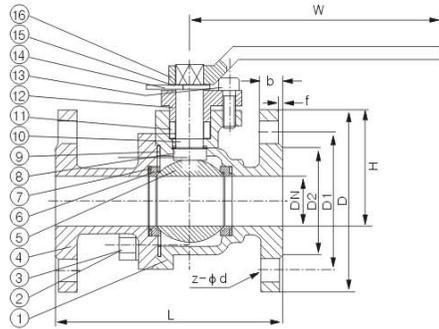

主要零件及材质 Main Parts and Materials

1	BODY	CF8M/CF8
2	BOLT	SS304/SS
3	SPRING WASHER	SS304/SS
4	CAP	CF8M/CF8
5	BALL	SS316/SS304
6	SEAT	SS316/SS304
7	SEAL	GRAPHITE
8	STEM SEAL	GRAPHITE
9	SEAL RING	SPRIAL SEALS
10	STEM	SS316/SS304
11	PACKING	GRAPHITE
12	PACKING GLAND	CF8M
13	BOLT	SS304
14	STOP PIECE	SS304/Q235+ENP
15	STOP PIN	65MN
16	HANDLE	WCB

主要外形尺寸 Main outer size

Q41-PN16										Q41-PN25										Q41-PN40									
DN	L	D	D1	D2	H	b-f	Z-φd	W		DN	L	D	D1	D2	H	b-f	Z-φd	W		DN	L	D	D1	D2	H	b-f	Z-φd	W	
15	130	95	65	45	60	14-2	4-14	108	40	180	145	110	85	160	16-3	4-18	240	15	130	95	65	45	60	16-2	4-14	40			
20	140	105	75	55	64	14-2	4-14	120	50	200	160	125	100	205	20-3	4-18	270	20	140	105	75	55	65	16-2	4-14	51			
25	150	115	85	65	90	16-2	4-14	165	65	220	180	145	120	215	22-3	8-18	350	25	150	115	85	65	90	18-2	4-14	58			
32	165	135	100	78	105	16-2	4-18	180	80	250	195	160	135	230	22-3	8-18	400	32	180	135	100	78	105	18-2	4-18	66			
40	180	145	110	85	150	16-3	4-18	240	100	280	230	190	160	270	24-3	8-23	500	40	200	145	110	85	170	18-3	4-18	76			
50	200	160	125	100	190	16-3	4-18	240	125	320	270	220	188	300	28-3	8-25	600	50	220	160	125	100	230	20-3	4-18	88			
65	220	180	145	120	195	18-3	4-18	320	150	360	300	250	218	340	30-3	8-25	900	65	250	180	145	120	250	22-3	8-18	110			
80	250	195	160	135	215	20-3	8-18	350	200	400	360	310	278	400	34-3	12-25	1100	80	280	195	160	135	250	22-3	8-18	121			
100	280	215	180	155	250	20-3	8-18	400										100	320	230	190	160	295	24-3	8-23	150			
125	320	245	210	185	280	22-3	8-18	500										125	400	270	220	188	330	28-3	8-25	176			
150	360	280	240	210	320	24-3	8-23	600										150	400	300	250	218	375	30-3	8-25	204			
200	400	335	295	265	370	26-3	12-23	800										200	550	375	320	282	440	38-3	12-30	260			


三片式法兰球阀
3PC Flanged Ball Valve



特点 Features

- * 压力: PN16
- * 结构长度: GB/T12221-1989
- * 法兰标准: GB/T9113
- * 设计: GB/T12237-1989
- * 测试: GB/T13927-1992
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * PRESSURE: PN16
- * STRUCTURE LENGTH: GB/T12221-1989
- * FLANGE END DIMENSIONS: GB/T9113
- * DESIGN: GB/T12237-1989
- * TEST: GB/T13927-1992
- * MATERIAL STANDARD: S45C/ASTM A216GR-WCB/DIN1.00619
SS316/ASTM A351GR-CF8M/DIN1.4408
SS304/ASTM A351GR-CF8/DIN1.4308

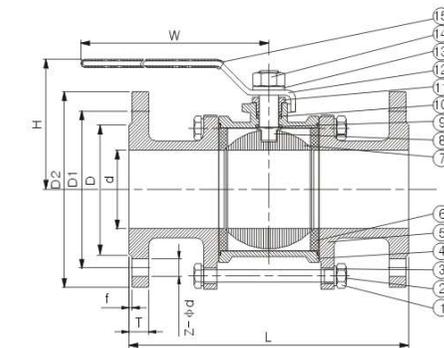


主要零件及材质 Main Parts and Materials

1	HEX NUT	SS304/SS
2	BOLT	SS304/SS
3	BOLT WASHER	SS304/SS
4	BODY	WCB/CF8M/CF8
5	CAP	WCB/CF8M/CF8
6	SEAT	PTFE
7	BALL	SS316/SS304/SS
8	STEM	SS316/SS304/SS
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SS304/SS
12	HANDLE	SS304/SS
13	SPRING WASHER	SS304/SS
14	STEM NUT	SS304/SS
15	PLASTIC COVER	PLASTIC

主要外形尺寸 Main outer size

NPS	DN	d	D	D1	D2	T	f	L	W	H	Z-φd
1/2"	15	15	45	65	95	16	2	130	125	75	4-φ14
3/4"	20	20	58	75	105	16	2	150	125	85	4-φ14
1"	25	25	68	85	115	16	2	160	125	95	4-φ14
1 1/4"	32	32	78	100	140	18	2	180	135	100	4-φ18
1 1/2"	40	38	88	110	145	18	3	193.5	165	100	4-φ18
2"	50	50	102	125	160	18	3	225	170	135	4-φ18
2 1/2"	65	65	122	145	185	20	3	290	170	135	4-φ18
3"	80	76	138	160	200	20	3	310	240	135	8-φ18
4"	100	100	158	180	220	20	3	350	245	140	8-φ18

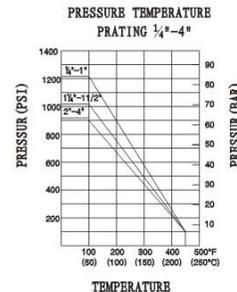

三通球阀 Three Way Ball Valve



特点 Features

- * 螺纹标准: NPT, BSPT, DIN259/2999, ISO228 CLASS A
- * 最大压力: 6.4Mpa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 缩径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308



- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * REDUCED PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	CF8/CF8M
2	GASKET	PTFE
3	CAP	CF8/CF8M
4	SEAT	PTFE
5	BALL	SS304/SS316/SS
6	STEM	SS304/SS316/SS
7	THRUST WASHER	PTFE
8	FILLER	PTFE
9	GLAND	SS304/SS
10	GASKET	PTFE
11	CAP	CF8/CF8M
12	HANDLE	SS304/SS
13	SPRING WASHER	SS304/SS
14	FLOW INDICATION PLATE	SS304/SS
15	LOCKING PIECE	SS304/SS
16	LEATHER SHEATH	PVC

主要外形尺寸 Main outer size

DN	NPS	D	L	W	H	K
8	1/4	6	67	90	50	49
10	3/8	6	67	90	50	49
15	1/2"	12	75	115	60	60
20	3/4"	15	84	120	65	62
25	1"	20	90	150	70	70
32	1 1/4"	25	123	155	77	93
40	1 1/2"	32	139	205	89	107
50	2"	40	150	205	100	120

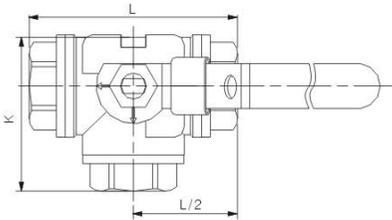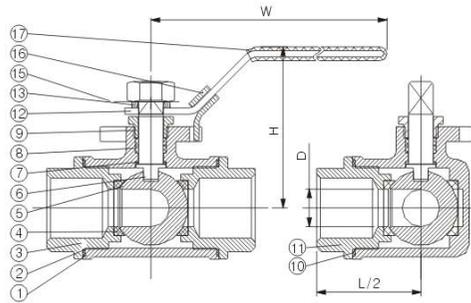

三通球阀 (ISO) Three Way Ball Valve With Platform



特点 Features

- * 螺纹标准: NPT, BSPT, DIN259/2999, ISO228 CLASS A
- * 最大压力: 6.4Mpa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 缩径
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308




- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * MAX PRESSURE: 6.4MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * REDUCED PORT
- * INVESTMENT CASTING BODY
- * 1000PSI(PN64)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	CF8/CF8M
2	CAP	CF8/CF8M
3	CAP	CF8/CF8M
4	BALL	SS304/SS316/SS
5	SEAT	PTFE
6	GASKET-A	PTFE
7	GASKET-B	PTFE
8	STEM	SS304/SS316/SS
9	THRUST WASHER	PTFE
10	PACKING	PTFE
11	GLAND	SS304/SS
12	STEM NUT	SS304/SS
13	BLOCK ONLY RETREAT	SS304/SS

主要外形尺寸 Main outer size

NPS	D	L	h1	h2	E	Ra	Rb	Rc	Rd	K
1/2"	12	73.5	36.75	9	39.0	18	21	3	3.0	9
3/4"	15	82.5	39.75	9	47.5	18	21	3	3.0	9
1"	18	89.0	47.25	11	53.0	21	25	3	3.5	11
1 1/4"	25	125.5	66.00	11	75.0	21	25	3	3.5	11
1 1/2"	32	139.0	71.50	14	86.5	25	35	3.50	4.5	14
2"	45	154.5	77.00	14	98.0	25	35	3.50	4.5	14

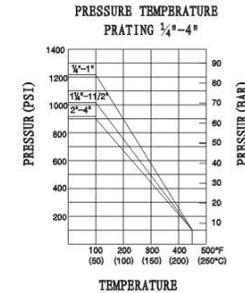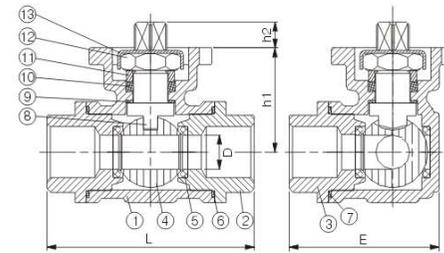

其它阀门系列 Other Valves Series



不锈钢闸阀 Stainless Steel Gate Valve




特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 压力范围: 1.6MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 铸造商体
- * 材质标准: S45C/ASTM A216Gr-WCB, DIN1.00619
SS316/ASTM A351Gr-CF8M, DIN1.4408
SS304/ASTM A351Gr-CF8, DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * PRESSURE RANGE: 1.6MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * 200PSI(PN16)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB, DIN1.00619
SS316/ASTM A351Gr-CF8M, DIN1.4408
SS304/ASTM A351Gr-CF8, DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	SS304/SS316
2	DISC	SS304/SS316
3	BONNET	SS304/SS316
4	GASKET-A	PTFE
5	O RING	VITON
6	GASKET-B	PTFE
7	CAP NUT	SS304/SS316
8	STEM	SS304/SS316
9	HANDLE	WCB
10	SPRING WASHER	SS304
11	STEM NUT	SS304

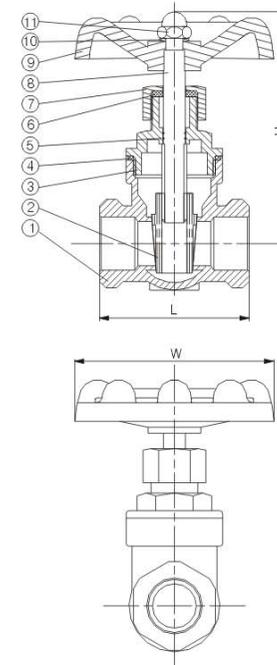

主要外形尺寸 Main outer size

NPS	DN	L	W	H
1/2"	15	55	72	85
3/4"	20	60	72	85
1"	25	66	80	112
1 1/4"	32	75	80	120
1 1/2"	40	85	90	146
2"	50	95	100	160
2 1/2"	65	110	130	200
3"	80	120	140	230

不锈钢截止阀

Stainless Steel Globe Valve

特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 压力范围: 1.6MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * PRESSURE RANGE: 1.6MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * 200PSI(PN16)W.O.G
- * MATERIAL STANDARD : S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	304/316
2	PETAL	304/316
3	STEM	304/316
4	GASKET	PTFE
5	CAP	304/316
6	WASHER	304/316
7	NUT	304
8	RING	304
9	HANDWHEEL	ALUMINUM ALLOY
10	GLAND RING	304
11	STEM PACKING	PTFE

主要外形尺寸 Main outer size

NPS	DN	L	H	D1
1/2"	15	66	100	70
3/4"	20	80	106	70
1"	25	90	118	80
1 1/4"	32	105	134	80
1 1/2"	40	120	152	100
2"	50	141	172	100
2 1/2"	64	165	185	145

旋启式止回阀

Swing check Valve

特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 压力范围: 1.6MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 铸造阀体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * PRESSURE RANGE: 1.6MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * 200PSI(PN16)W.O.G
- * MATERIAL STANDARD : S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	BODY	WCB/CF8/CF8M
2	DISC	CF8/CF8M
3	HINGE PIN	CF8
4	BOLT	SS304
5	GASKET-A	PTFE
6	BONNET	WCB/CF8/CF8M
7	GASKET-B	PTFE

主要外形尺寸 Main outer size



NPS	d	L	H
1/2"	15.0	64.0	40.5
3/4"	20.0	80.0	45.0
1"	25.0	87.0	54.0
1 1/4"	32.0	104.0	61.5
1 1/2"	40.0	119.0	74.0
2"	50.0	136.0	79.0
2 1/2"	65.0	180.0	93.0
3	80.0	200.0	104.0



WB-50



WB-51

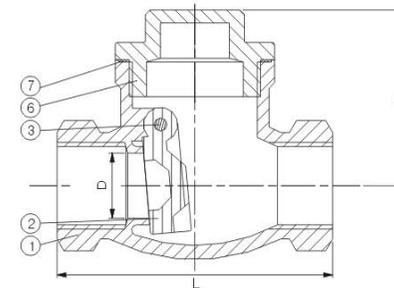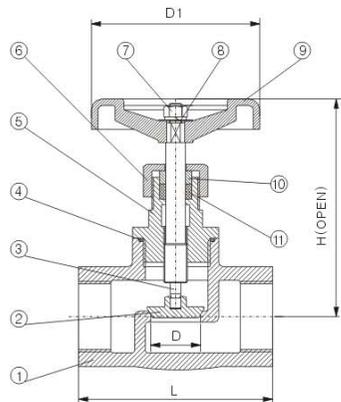

弹簧式止回阀 Spring Check Valve



WB-52

特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 压力范围: 1.6MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 铸造网体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308


- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * PRESSURE RANGE: 1.6MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * 200PSI(PN16)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	CAP	CF8/CF8M
2	GASKET	PTFE
3	BODY	CF8/CF8M
4	STEM	304/316
5	SPRING	304/316

主要外形尺寸 Main outer size

NPS	RC	D	L
1/2"	1/2"	14	61
3/4"	3/4"	20	65
1"	1"	25	78
1 1/4"	1 1/4"	32	88
1 1/2"	1 1/2"	36	100
2"	2"	50	110

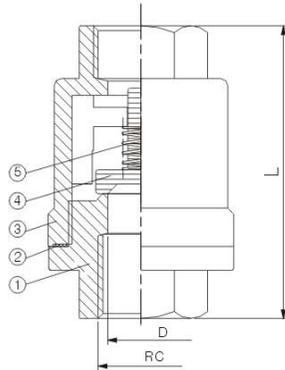

Y型过滤器 Y-type Strainer



WB-53



WB-54

特点 Features

- * 螺纹标准: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * 压力范围: 1.6MPa
- * 温度范围: -20°C~232°C
- * 适用介质: 水, 石油, 空气, 和一些腐蚀性的液体
- * 铸造网体
- * 材质标准: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308



- * THREAD STANDARD: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- * PRESSURE RANGE: 1.6MPa
- * TEMPERATURE RANGE: -20°C~232°C
- * SUITABLE MEDIUM: WATER, OIL, AIR AND SOME CORROSIVE LIQUIDS
- * 200PSI(PN16)W.O.G
- * MATERIAL STANDARD: S45C/ASTM A216Gr-WCB/DIN1.00619
SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

主要零件及材质 Main Parts and Materials

1	MESH	SS304/SS316
2	BODY	WCB/CF8/CF8M
3	SEAL	PTFE
4	CAP	WCB/CF8/CF8M

主要外形尺寸 Main outer size

NPS	D	L	H
1/2"	15	60	46
3/4"	20	75	55
1"	25	85	60
1 1/4"	32	100	68
1 1/2"	40	110	76
2"	50	130	100

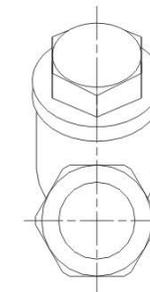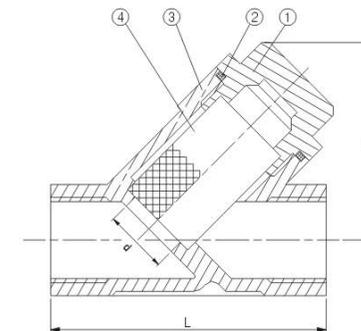


对夹式止回阀 Wafer Type Check Valve



特点 Features

- * 最大压力: PN40
- * 用途: 用于防止介质倒流, 通过选用不同的材质, 可适用于水、蒸汽、油品、硝酸、醋酸、强氧化性介质及尿素等多种介质。
- * 材质标准: SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

- * MAX PRESSURE: PN40
- * APPLICATION: Used to prevent the media back, through the use of different materials, applicable to water, steam, oil, nitric acid, acetic acid, strong oxidizing medium and urea and other media.
- * MATERIAL STANDARD: SS316/ASTM A351Gr-CF8M/DIN1.4408
SS304/ASTM A351Gr-CF8/DIN1.4308

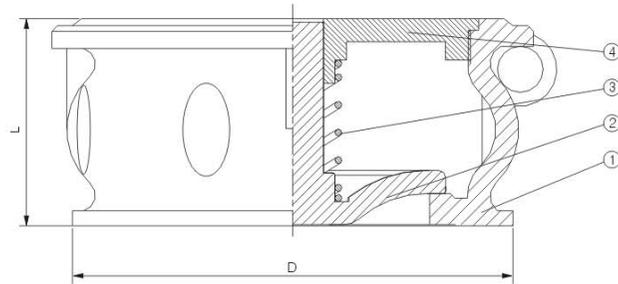

主要零件及材质 Main Parts and Materials

1	BODY	CF8
2	DISC	CF8
3	TORSION SPRING	CF8
4	CORER	SS304

主要外形尺寸 Main outer size

NPS	D	L
2"	103	60
2 1/2"	122	67
3	135	73
4	173	73
5	190	90
6	222	98
8	279	127

消防栓阀门 Fire Hydrant Valve



用途 Use

- 产品型号: SNZ40、SNZ50、SNZ65
- 产品特性: 内丝
- 产品材质: 不锈钢
- 产品信息: 室内消防栓是安装在建筑物内消防管网上, 向火场供水的带有阀门的接口。它是工厂、仓库、高层建筑、及船舶等室内固定消防设备, 用于扑救建筑物内火灾, 通常安装在消防栓箱内, 与消防水带和水枪等配套使用。

- SIZE: SNZ40、SNZ50、SNZ65
- CONSTRUCTION: INTERNAL THREAD
- MATERIAL: STAINLESS STEEL
- PRODUCT INFO: Fire hydrant is installed in a building fire control line to the fire with a water supply valve interface. It is a factory, warehouse, high-rise buildings, and marine and other indoor fixed fire-fighting equipment for fighting fires in buildings, usually installed in the fire hydrant box, and fire hoses and water cannons, and other ancillary uses.

高压接头 High Pressure Joint




特点 Features

- 最大压力: 6000 psi(4136BAR)
- 最大温度: 230°C(446 °F)
- 产品材质: SS304、SS316
- 螺纹标准: NPT, BSPT, DIN259/2999, ISO 228
- 应用领域: 船舶、设备、石油、化工、天然气等行业中液压系统仪表管线; 气体取样管线; 标准计量; 仪表控制盘; 实验工厂的腐蚀性液体和高压系统; 研究实验室。

- MAX PRESSURE: 6000 PSI(4136BAR)
- MAX TEMPERATURE: 230°C(446°F)
- MATERIAL: SS304, SS316
- THREAD STANDARD: NPT, BSPT, DIN259/2999, ISO 228
- APPLICATION: Ships, equipment, petroleum, chemical, natural gas pipeline industry in the hydraulic system instrumentation; gas sampling lines; standard measurement; instrument panel; the plot plant of corrosive liquids and high pressure systems; Research Laboratory

电动阀门系列 Electric Valves Series

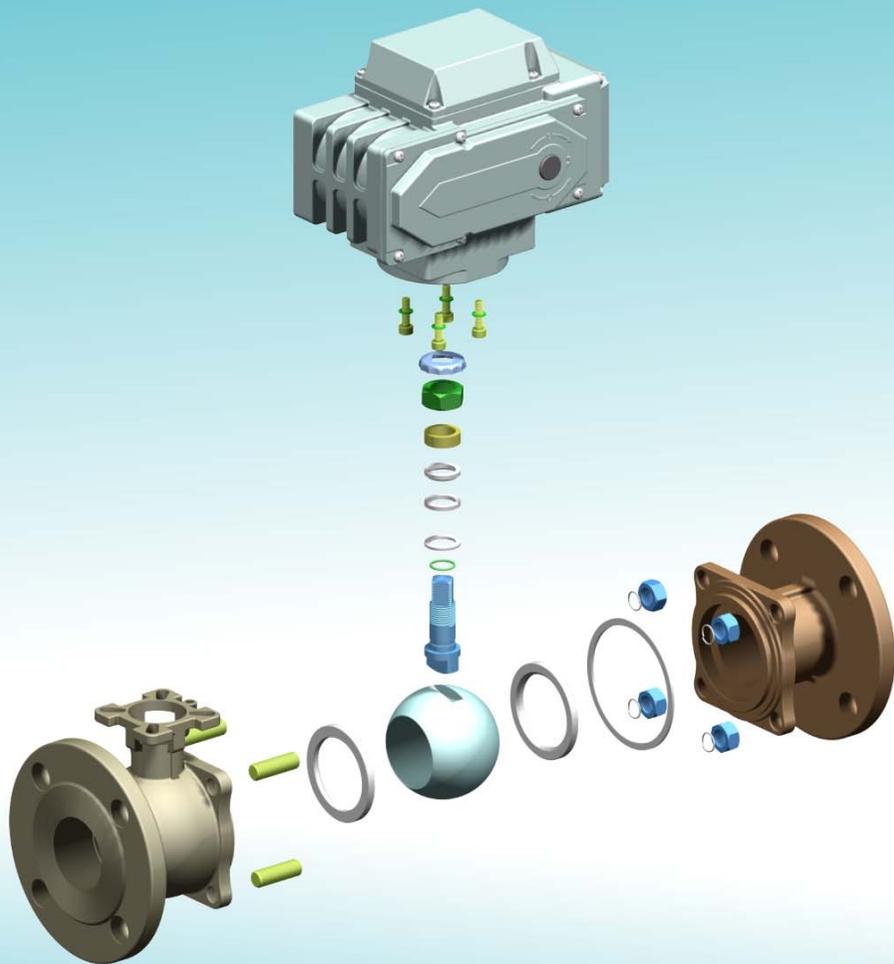

Wenzhou Wenbao ball valve Co., Ltd.



WB-60

电动薄型意大利式球阀
Electric Italy Type Thin Ball Valve



WB-61

电动二片式球阀
Electric 2PC Ball Valve



WB-62

电动二片式法兰球阀
Electric 2PC Flanged Ball Valve



WB-63

2PC法兰球阀(台湾电动)
2PC Flanged Ball Valve(Taiwan Electric)



WB-64

电动二片式法兰球阀
Electric 2PC Flanged Ball Valve




WB-65

电动三片式球阀
Electric 3PC Ball Valve

不锈钢快速接头 (304、316)
Quick-joint (CF8、CF8M)



WB-72




TYPE: A

ADAPTOR FEMALE

SIZE	Inch	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
B		16.5	21	24	28.8	36	45.8	56.5	73.6	101	150
C		38	38	48	56	58	61	87	71	83.6	86
D		32.5	32.5	39	48	56	67.5	83	97	123.6	182



WB-73

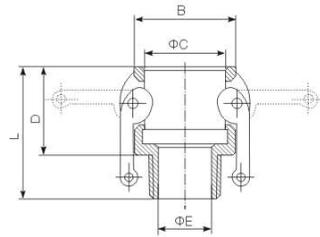

TYPE: B


COUPLER MALE

SIZE	Inch	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
B		53	53	60	81.3	88.5	99.5	110.5	131	159	220
C		42	42	47	58	66.5	78	92	109	138	199
D		32	32	40	48	49	54	59	60	62	72
E		14	19	25	32	39	50	59	75	100	146
L		50	52	62	72	72	80	90	93	100	118

不锈钢快速接头 (304、316)
Quick-joint (CF8、CF8M)



WB-74

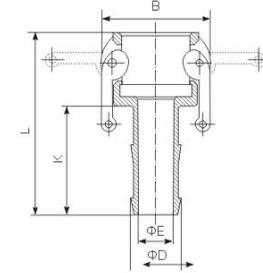


TYPE: C

COUPLER HOSE SHANK

SIZE	Inch	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
B		53	53	60	81.3	88.5	99.5	110.5	131	159	220
D		15	21.4	27.4	34	40.5	53	66.5	79.4	104.8	157
E		8	14	20	25	31	43	55	67	92	140
K		43	51	60	61	64	78	85	102	110	141
L		75	83	100	109	113	132	144	162	172	213



WB-75

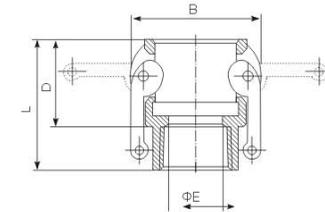

TYPE: D


COUPLER FEMALE

SIZE	Inch	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
B		53	53	60	81.3	88.5	99.5	110.5	131	159	220
D		32	32	40	48	49	54	59	60	62	72
E		15	20	25	32	39	50	61	75	92	145
L		50	50	60	68	71	78	85	90	96	118

不锈钢快速接头 (304、316)
Quick-joint (CF8、CF8M)



WB-76

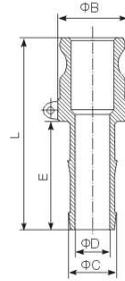


TYPE: E

ADPRTOR HOSE SHANK

SIZE	Inch	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
B		34.5	34.5	39	48	56	66.3	80	96	122	188
C		15	21.4	27.4	34	40.5	53	66.5	79	104.8	167
D		8	14	20	26	31	43	55	68	92	140
E		45	54	60	61	64	78	85	101.6	110	141
L		85	94	106	115	120	140	150	165.1	180	220



WB-77

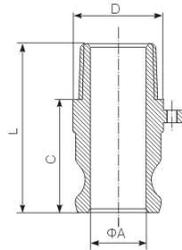

TYPE: F


ADAPTOR MALE

SIZE	Inch	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
A		14	21	24	28.8	36	45	56.5	75.8	96	150
C		40	40	48	56	58	62	70	77	79	86
D		32.5	32.5	39	48	56	67	83	99.6	124	182
L		57	57	72	80	82	88	100	100.5	115	130

不锈钢快速接头 (304、316)
Quick-joint (CF8、CF8M)



WB-78

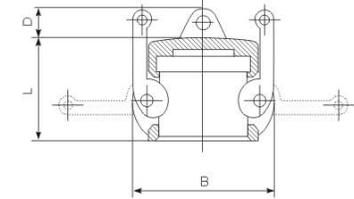


TYPE: DC

DUST CAP

SIZE	Inch	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
B		53	53	60	81.3	88.5	99.5	110.5	131	159	220
D		7.5	7.5	12	14	16	18	18	23	24	30
L		36	36	43	51	52	59	64	66	70	82



WB-79



TYPE: DP

DUST PLUG

SIZE	Inch	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
B		11	11	10	14	16	17	18	20	20	26
L		26.5	26.5	34	41	44	48	50	53	56	64